


AQ-AD300.2-MICRO WATERPROOF 2 CHANNEL AMPLIFIER FOR HARLEY-DAVIDSON® MOTORCYCLES



SPECIFICATIONS

Type:	Digital (Class D) Bridgeable Amplifier
Waterproof:	Yes - IP65
Input Channels (Low-Level):	RCA inputs (L & R)
Input Channels (High-Level):	Speaker inputs (L & R) with Auto Detect
Output Channels:	2
Output Impedance (nominal):	2 Ohm & 4 Ohm stable
Power Output (RMS) @ 4 Ohms:	100W per channel
Power Output (RMS) @ 2 Ohms:	150W per channel
Power Output (RMS) - Bridged @ 2 Ohms:	300W
THD:	<1%
THD (Bridged):	1%
Frequency Response:	10Hz - 45kHz
High-Pass/Low-Pass Cross-Over Frequency:	Configurable from 40Hz - 400Hz
Bass Boost (@ 85Hz):	Configurable from 0 - 12dB
Overload Protection:	Yes

DIMENSIONS

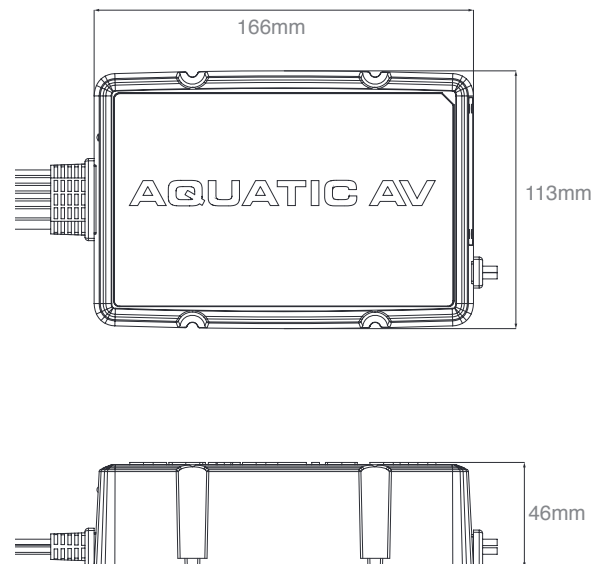

Design and specification subject to change without notice.E&OE

Aquatic AV

282 Kinney Drive
San Jose, CA 95112, USA

E-mail: info@aquaticav.com
US & Canada: 1 877 579 2782
International: +1 408 559 1668
Fax: +1 408 559 0125

www.aquaticav.com

Aquatic AV © 2017